


## Sådan skifter du din router til dynamisk IP adresse.

### 1.)


Åben Internet Explorer, eller anden internet browser.  
Indtast adressen <http://192.168.0.1> i adresse feltet.

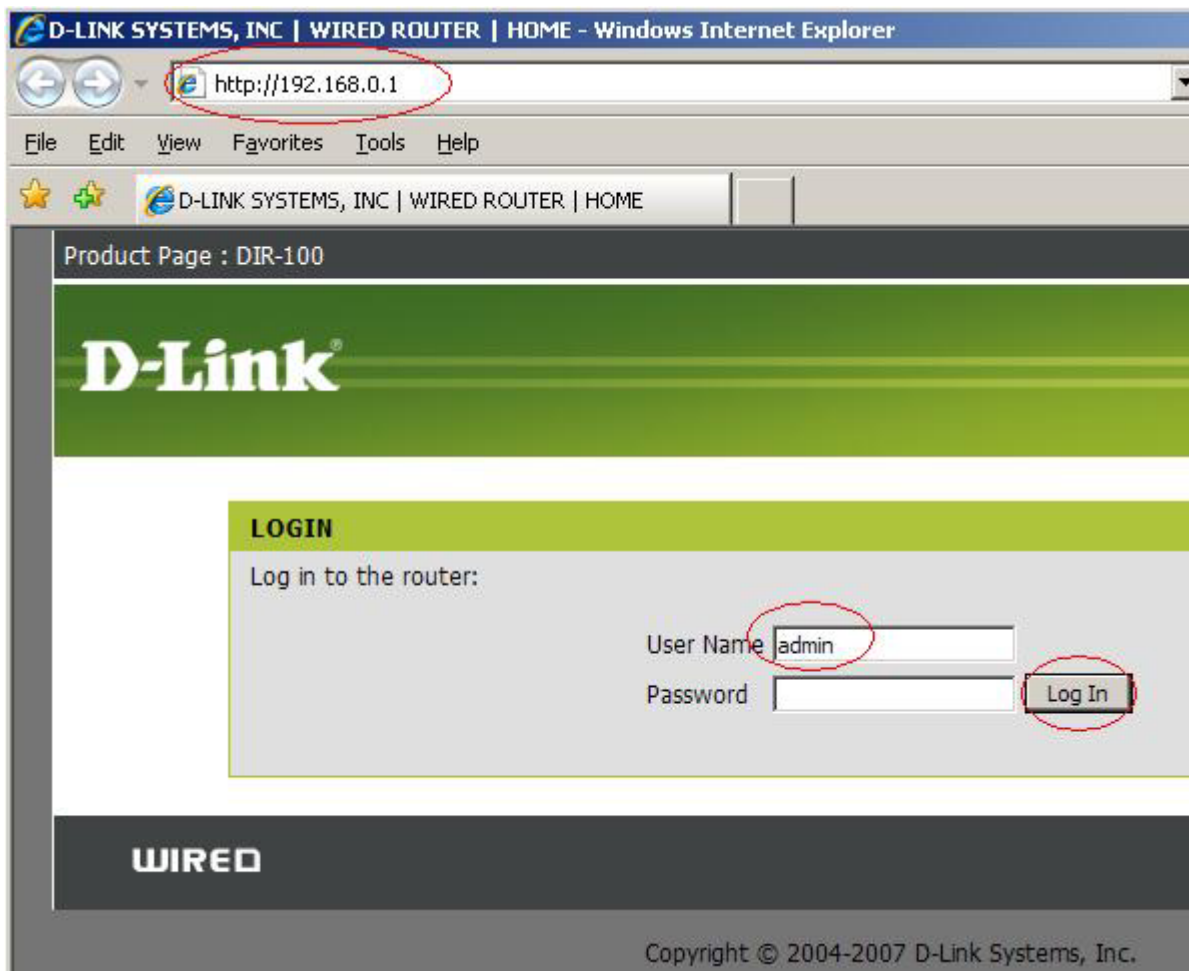

Indtast **admin** i user name feltet, lad password feltet være tomt.  
Tryk på **OK** knappen.

2.)

Nu vil routerns forside vise sig. Tryk på knappen med navnet **Manual Internet Connection Setup**.

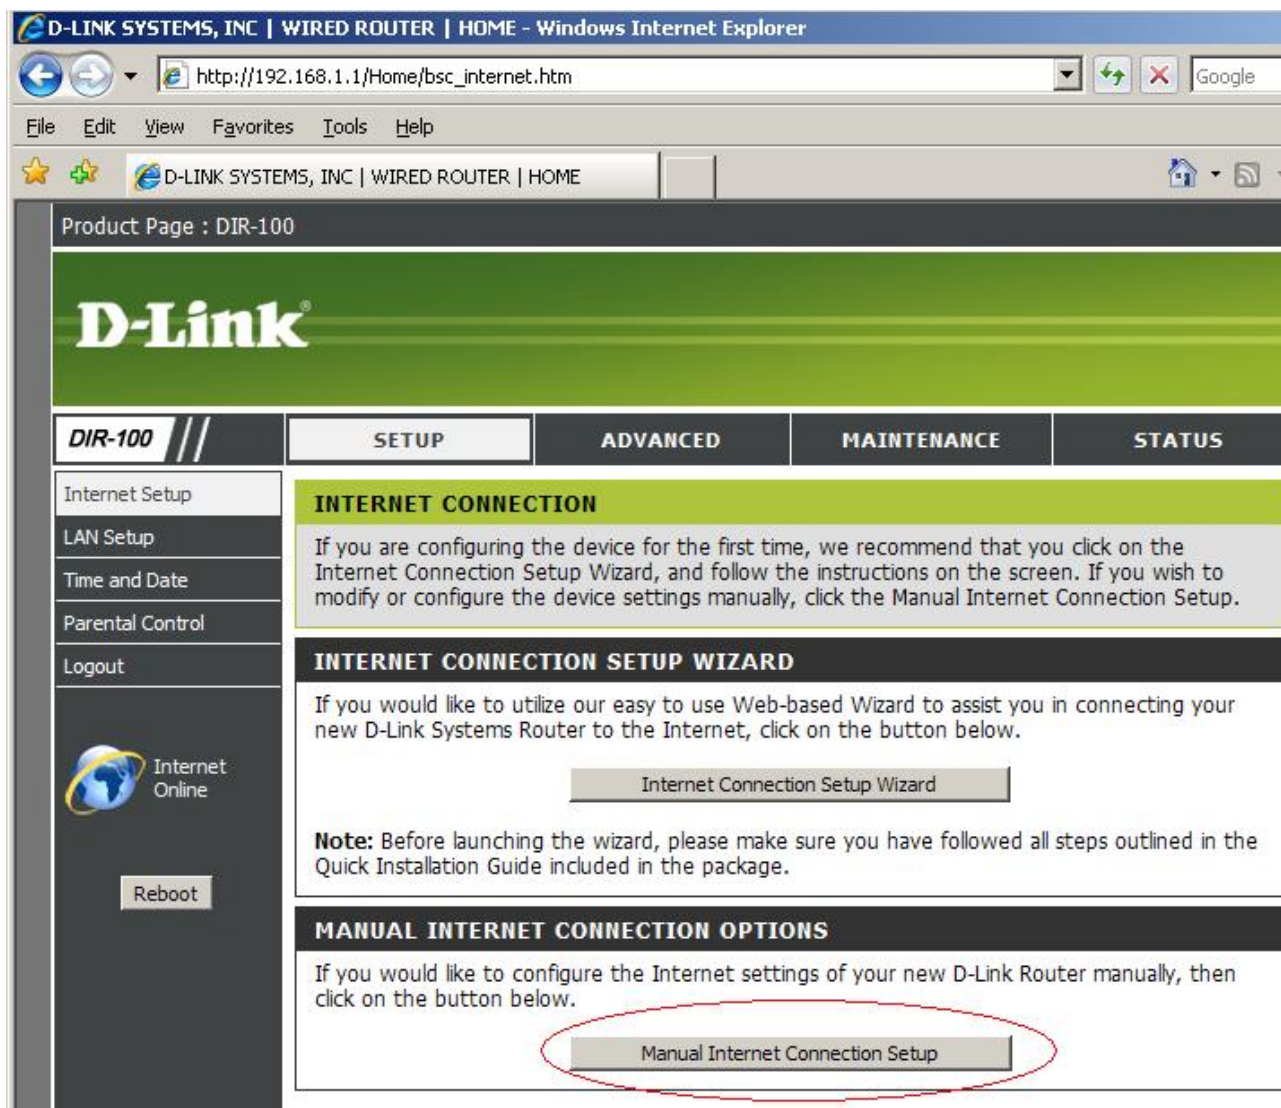

D-LINK SYSTEMS, INC | WIRED ROUTER | HOME - Windows Internet Explorer

http://192.168.1.1/Home/bsc\_internet.htm

File Edit View Favorites Tools Help

D-LINK SYSTEMS, INC | WIRED ROUTER | HOME

Product Page : DIR-100

**D-Link**

**DIR-100** // **SETUP** **ADVANCED** **MAINTENANCE** **STATUS**

Internet Setup  
LAN Setup  
Time and Date  
Parental Control  
Logout

Internet Online

Reboot

**INTERNET CONNECTION**

If you are configuring the device for the first time, we recommend that you click on the Internet Connection Setup Wizard, and follow the instructions on the screen. If you wish to modify or configure the device settings manually, click the Manual Internet Connection Setup.

**INTERNET CONNECTION SETUP WIZARD**

If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your new D-Link Systems Router to the Internet, click on the button below.

Internet Connection Setup Wizard

**Note:** Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.

**MANUAL INTERNET CONNECTION OPTIONS**

If you would like to configure the Internet settings of your new D-Link Router manually, then click on the button below.

Manual Internet Connection Setup

### 3.)

Du vil nu komme til routerens internetindstillinger.  
Vælg **Dynamic IP (DHCP)** fra listen, i "My Internet Connection is:"  
Tryk da på knappen **Save Settings**.




The screenshot shows the D-Link DIR-100 router's web interface in Internet Explorer. The browser address bar shows the URL `http://192.168.1.1/Home/bsc_internet_wan.htm`. The page title is "D-LINK SYSTEMS, INC | WIRED ROUTER | HOME". The main navigation menu includes "DIR-100", "SETUP", "ADVANCED", "MAINTENANCE", and "STATUS". The "SETUP" menu is expanded, showing "Internet Setup", "LAN Setup", "Time and Date", "Parental Control", and "Logout". The "Internet Setup" page is displayed, with the "INTERNET CONNECTION" section highlighted. The text reads: "Use this section to configure your Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPTP, L2TP, BigPond, Russia PPPoE, and Russia PPTP. If you are unsure of your connection method, please contact your Internet Service Provider." Below this is a note: "Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers." Two buttons are visible: "Save Settings" (circled in red and labeled '2') and "Don't Save Settings". The "INTERNET CONNECTION TYPE" section is also visible, with the text: "Choose the mode to be used by the router to connect to the Internet." Below this is a dropdown menu labeled "My Internet Connection is:" (circled in red and labeled '1'). The dropdown menu is open, showing the following options: "Dynamic IP (DHCP)", "Static IP", "Dynamic IP (DHCP)", "PPPoE (Username / Password)", "PPTP (Username / Password)", "L2TP (Username / Password)", "BigPond (Australia)", "Russia PPPoE (DUAL Access)", and "Russia PPTP (DUAL Access)". The "Dynamic IP (DHCP)" option is selected.

4.)

Du vil nu blive spurgt om du vil gemme indstillingerne.  
Tryk på knappen **OK**.



Vent nu ca. 20 sekunder.

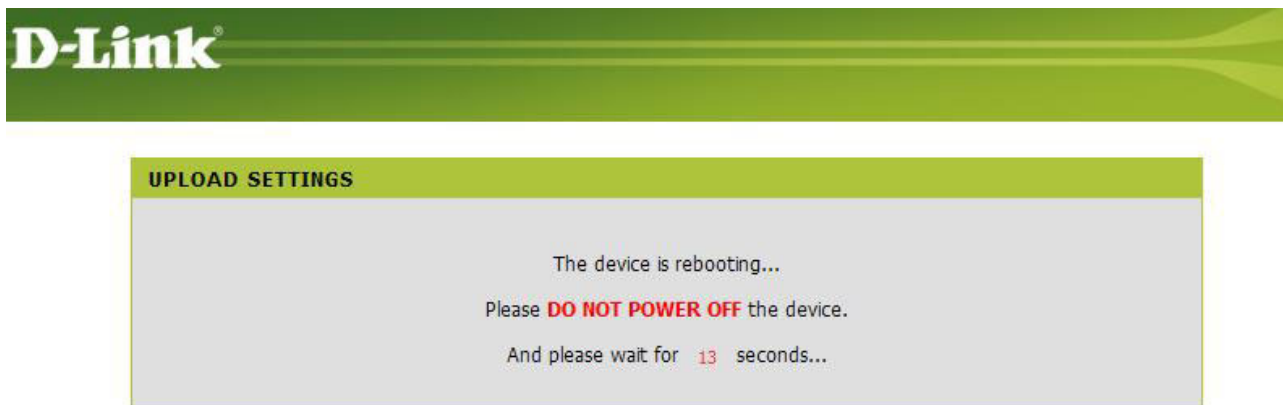

Du kan nu benytte internettet som du ønsker.