


## Sådan skifter du din router til dynamisk IP adresse.

### 1.)

Åben Internet Explorer, eller anden internet browser.  
Indtast adressen <http://192.168.0.1> i adresse feltet.

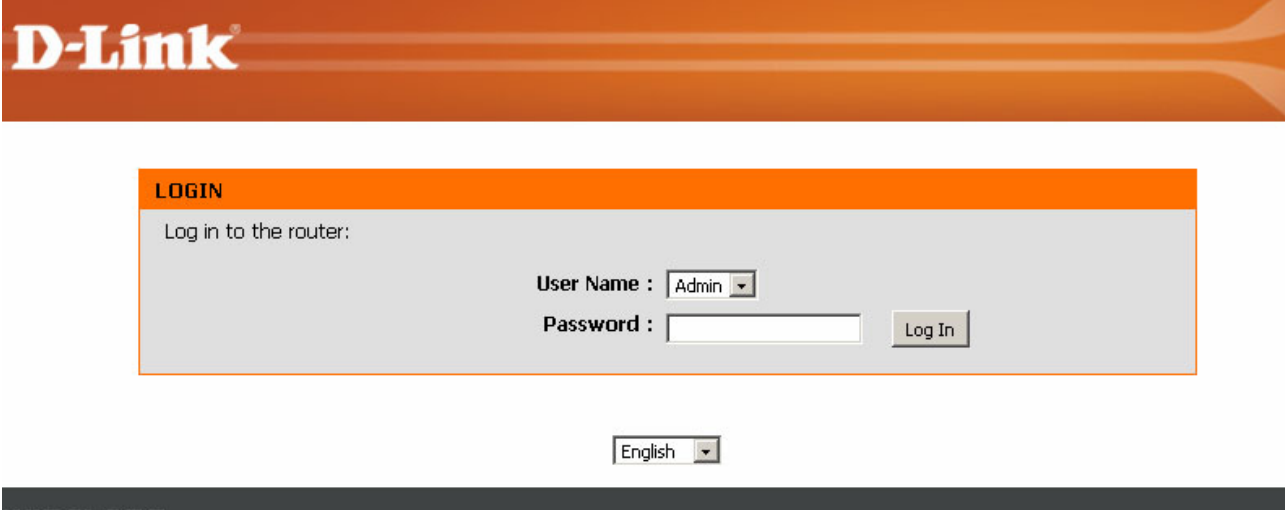

The screenshot shows the D-Link router's login interface. At the top is a dark orange banner with the 'D-Link' logo in white. Below this is a 'LOGIN' section with an orange header. The text 'Log in to the router:' is displayed. There are two input fields: 'User Name' with a dropdown menu showing 'Admin' and 'Password' with an empty text box. A 'Log In' button is positioned to the right of the password field. At the bottom of the login area is a language dropdown menu set to 'English'. The entire interface is set against a light gray background.

Vælg **admin** i user name feltet, lad password feltet være tomt.  
Tryk på **Log In** knappen.


2.)

Nu vil routerns forside vise sig. Tryk på knappen med navnet **Manual Internet Connection Setup**.

SETUP	ADVANCED	TOOLS	STATUS
<b>INTERNET CONNECTION</b>			
There are two ways to set up your Internet connection: you can use the Web-based Internet Connection Setup Wizard, or you can manually configure the connection.			
<b>INTERNET CONNECTION SETUP WIZARD</b>			
If you would like to utilize our easy to use Web-based Wizards to assist you in connecting your new D-Link Systems Router to the Internet, click on the button below.			
<a href="#">Internet Connection Setup Wizard</a>			
<b>Note:</b> Before launching these wizards, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.			
<b>MANUAL INTERNET CONNECTION OPTIONS</b>			
If you would like to configure the Internet settings of your new D-Link Systems Router manually, then click on the button below.			
<a href="#">Manual Internet Connection Setup</a>			

### 3.)

Du vil nu komme til routerens internetindstillinger.  
Vælg **Dynamic IP (DHCP)** fra listen, i "My Internet Connection is:"  
Tryk da på knappen **Save Settings**.

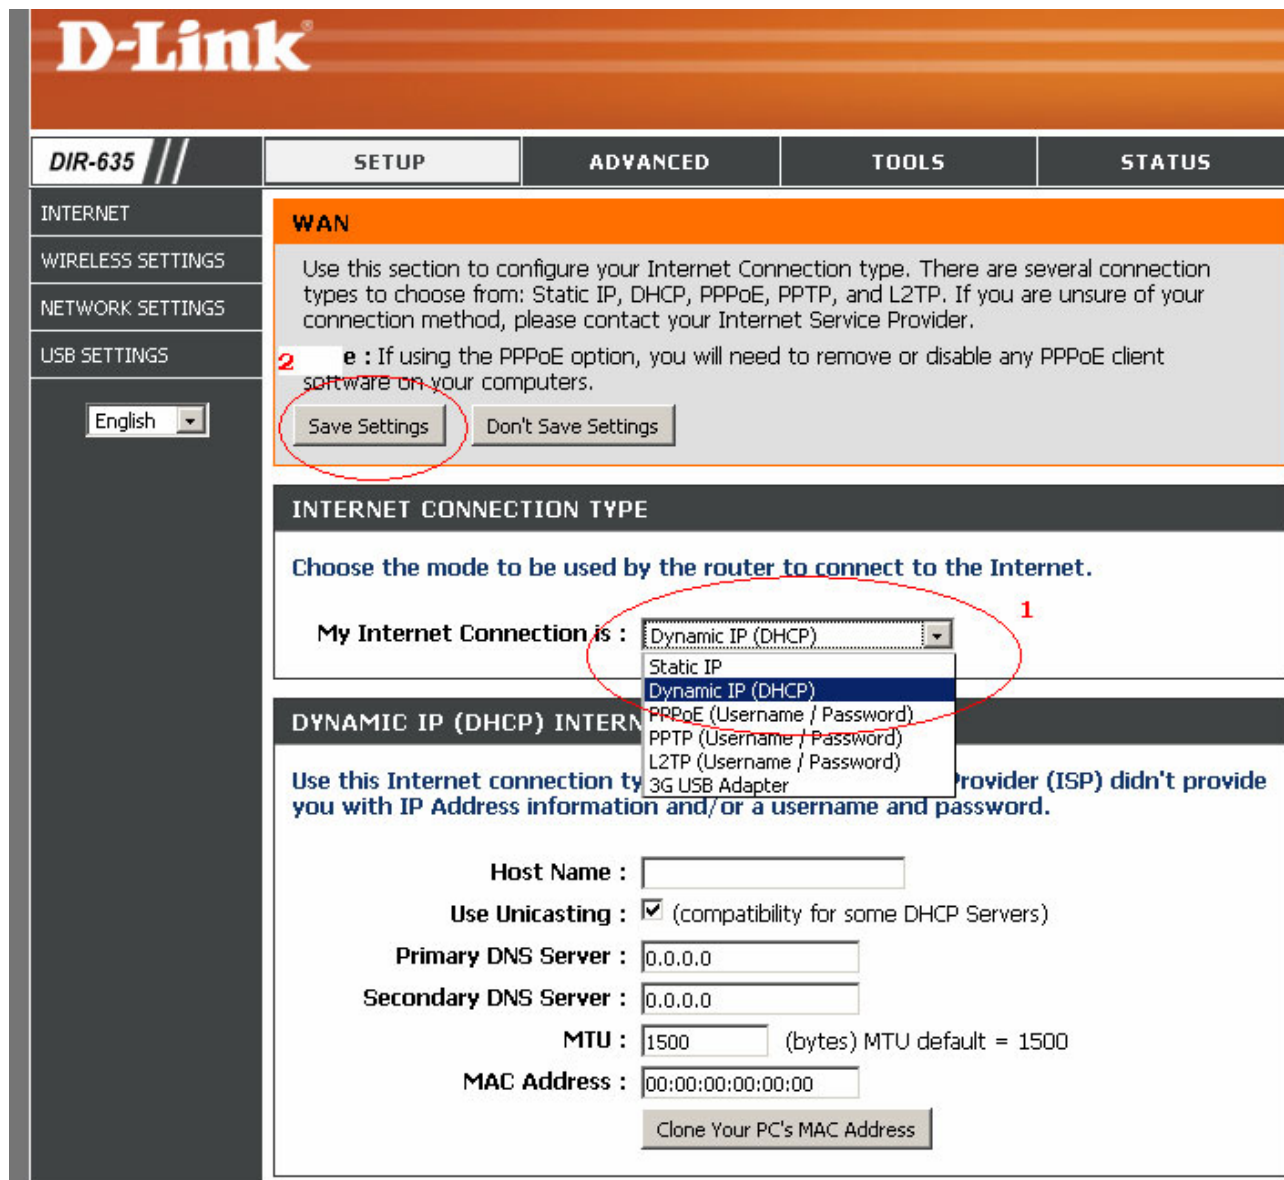

**D-Link**

**DIR-635** // **SETUP** **ADVANCED** **TOOLS** **STATUS**

**INTERNET**

**WIRELESS SETTINGS**

**NETWORK SETTINGS**

**USB SETTINGS**

English ▾

**WAN**

Use this section to configure your Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPTP, and L2TP. If you are unsure of your connection method, please contact your Internet Service Provider.

**2** e : If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

**Save Settings** **Don't Save Settings**

**INTERNET CONNECTION TYPE**

Choose the mode to be used by the router to connect to the Internet.

**My Internet Connection is :** **Dynamic IP (DHCP)** ▾ **1**

Static IP

Dynamic IP (DHCP)

PPPoE (Username / Password)

PPTP (Username / Password)

L2TP (Username / Password)

3G USB Adapter

**DYNAMIC IP (DHCP) INTERNET**

Use this Internet connection type if your Internet Service Provider (ISP) didn't provide you with IP Address information and/or a username and password.

**Host Name :**

**Use Unicasting :**  (compatibility for some DHCP Servers)

**Primary DNS Server :**

**Secondary DNS Server :**


**MTU :**  (bytes) MTU default = 1500

**MAC Address :**

**Clone Your PC's MAC Address**


4.)

Du vil nu blive spurgt om du vil gemme indstillingerne.  
Tryk på knappen **Reboot Now**.

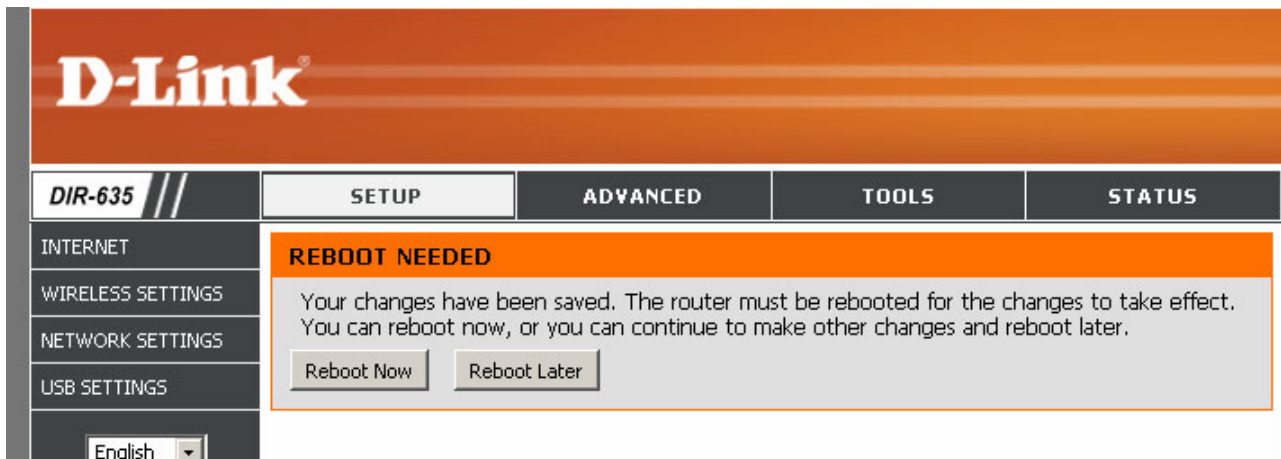

The screenshot shows the D-Link DIR-635 router configuration interface. The top navigation bar includes 'DIR-635', 'SETUP', 'ADVANCED', 'TOOLS', and 'STATUS'. The left sidebar lists 'INTERNET', 'WIRELESS SETTINGS', 'NETWORK SETTINGS', 'USB SETTINGS', and a language dropdown set to 'English'. A central orange box displays the message: 'REBOOT NEEDED. Your changes have been saved. The router must be rebooted for the changes to take effect. You can reboot now, or you can continue to make other changes and reboot later.' Below this message are two buttons: 'Reboot Now' and 'Reboot Later'.

Vent nu ca. 20 sekunder.

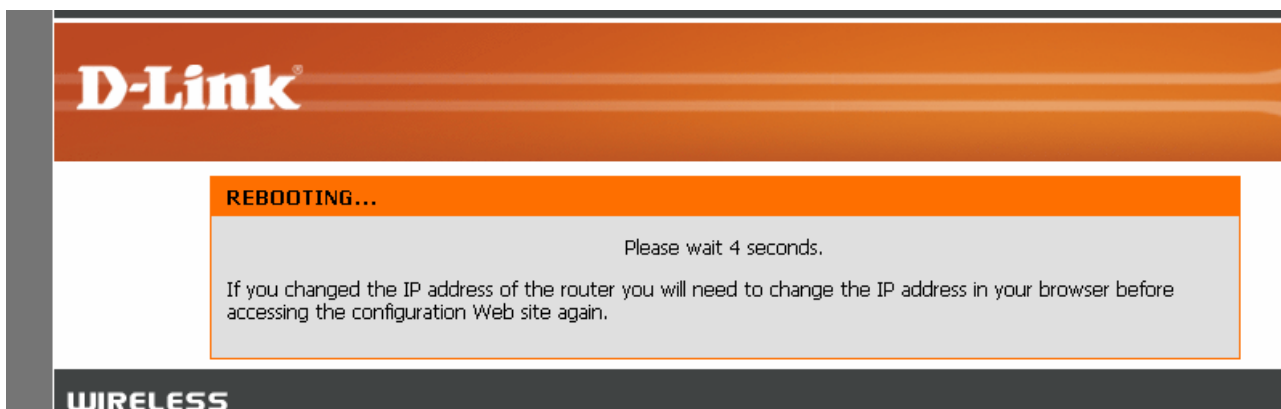

The screenshot shows the D-Link router configuration interface during a reboot. The top navigation bar is visible. A central orange box displays the message: 'REBOOTING... Please wait 4 seconds. If you changed the IP address of the router you will need to change the IP address in your browser before accessing the configuration Web site again.' The bottom of the page shows the 'WIRELESS' section header.

Du kan nu benytte internettet igen.